




MINIATURES



Part #	Volts	Amps	Base	Shape	Life	Fig.#
12PSB	12	0.17	SLIDE #5	T2	12000	25
13	3.7	0.3	E10	G3.5	15	36
14	2.47	0.3	E10	G3.5	15	36
15	7	0.4	G4	G4.5	500	17
24PSB	24	0.073	SLIDE #5	T2	10000	25
28PSB	28	0.04	SLIDE #5	T2	5000	25
44	6.3	0.25	BA9	T3.25	3000	27
47	6.3	0.15	BA9	T3.25	3000	27
50	7.5	0.22	E10	G3.5	1000	36
51	7.5	0.22	BA9	G3.25	1000	37
53	14.4	0.12	BA9	G3.5	1000	37
55	7	0.41	BA9	G4.5	500	38
57	14	0.24	BA9	G4.5	500	38
64	7	0.63	BA15D	G6	1000	15
73	14	0.08	WEDGE	T1.75	15000	32
74	14	0.1	WEDGE	T1.75	1000	32
82	6.5	1.02	BA15D	G6	500	15
85	28	0.04	WEDGE	T1.75	7000	32
86	6.3	0.2	WEDGE	T1.75	20000	32
90	13	0.58	BA15D	G6	750	15
93	12.8	1.04	BA15S	S8	700	10
120MB	120	0.025	BA9	T2.5	10000	26
120PSB	120	0.025	SLIDE #5	T2	7500	25
130MB	130	0.025	BA9	T3.25	5000	27
147	7	0.43	WEDGE	T3.25	1500	22
157	5.8	1.1	E10	G6	50	34
161	14	0.19	WEDGE	T3.25	4000	22
168	14	0.35	WEDGE	T3.25	1500	22
192	12	0.33	WEDGE	T3.25	1000	22
194	14	0.27	WEDGE	T3.25	2500	22
211-2	12.8	0.97	MIN. CAP	T3	1000	6
222	2.25	0.25	E10	TL3	1000	28
245	2.46	0.5	E10	G3.5	15	36
259	6.3	0.25	WEDGE	T3.25	5000	22
328	6	0.2	SX6	T1.75	1000	31
334	28	0.04	S5.7S	T1.75	4000	30
382	14	0.08	SX6	T1.75	4000	31

Part #	Volts	Amps	Base	Shape	Life	Fig.#
387	28	0.04	SX6	T1.75	7000	31
400	28	0.1	WEDGE	T3.25	1000	22
413	4.8	0.3	E10	G3.5	30	36
425	5	0.5	E10	G4.5	15	35
555	6.3	0.25	WEDGE	T3.25	3000	22
605	6.15	0.5	E10	G4.5	15	35
656	28	0.06	WEDGE	T3.25	2500	22
755	6.3	0.15	BA9	T3.25	20000	27
756	14	0.08	BA9	T3.25	15000	27
757	28	0.08	BA9	T3.25	15000	27
778	6	3.33	G4	T2.75	100	18
782	12	1.66	G4	T2.75	2000	18
783	12	1	G4	T2.25	50	20
787	6	1.67	G4	T2.25	100	20
788	6	3.33	G4	T2.25	100	20
795	12.8	3.8	BA15S	T4	200	9
908	6	1.5	WEDGE	T5	50	16
909	6	0.62	WEDGE	T5	50	16
912	12.8	1	WEDGE	T5	1000	16
914	4	0.9	WEDGE	T5	50	16
915	12	0.75	WEDGE	T5	50	16
916	13.5	0.54	WEDGE	T5	10000	16
918	12.8	0.56	WEDGE	T5	500	16
921	12.8	1.4	WEDGE	T5	500	16
927	6	1.2	WEDGE	T5	50	16
939	6	0.9	WEDGE	T5	50	16
1003	12.8	0.94	BA15S	B6	200	7
1004	12.8	0.94	BA15D	B6	200	12
1073	12.8	1.8	BA15S	S8	200	10
1133	6.2	3.91	BA15S	RP11	200	1
1141	12.8	1.44	BA15S	S8	1000	10
1142	12.8	1.44	BA15D	S8	1000	11
1152	12.8	1.34	BA15D	S8	500	11
1156	12.8	2.1	BA15S	S8	1200	10
1157	12.8	2.1	BA15D	S8	1200	11
1195	12.5	3	BA15S	RP11	300	1
1240	32	3.6	P15D	G16.5	35	33

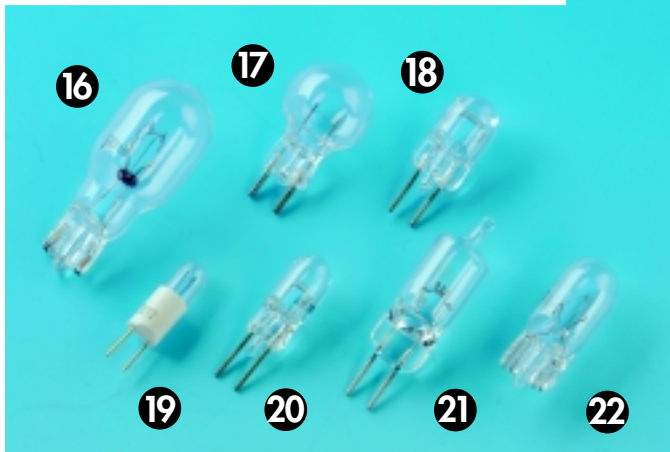

Part #	Volts	Amps	Base	Shape	Life	Fig.#
1252	28	0.23	BA15D	G6	2000	15
1449	14	0.20	E10	G3.5	250	37
1460	6.5	2.75	P30D	S8	100	3
1468	6	4.5	P30D	S8	500	3
1493	6.5	2.75	BA15D	S8	100	11
1594	6	5	BA15D	S8	250	11
1630	6.5	2.75	P30D	S8	100	3
1634	20	1	P15D	S8	200	3
1638	28	1.02	BA15D	S8	500	11
1680	6	4.1	BA15S	S8	300	10
1724	6.2	4.5	BA15D	S11	400	4
1815	14	0.20	BA9	T3.25	3000	27
1816	13	0.33	BA9	T3.25	1000	27
1818	24	0.17	BA9	T3.25	250	27
1819	28	0.04	BA9	T3.25	2500	27
1820	28	0.1	BA9	T3.25	1000	27
1829	28	0.07	BA9	T3.25	1000	27
1892	14.4	0.12	BA9	T3.25	1000	27
1893	14	0.33	BA9	T3.25	7500	27
1895	14	0.27	BA9	G4.5	2000	38
2017	14	0.28	G4	T3.25	150	21
2530	5.9	6.53	P30D	RP11	200	2
1460X	6.5	2.75	P30D	S8	100	3
1631X	6.5	2.75	P30D	S8	100	3
1680X	6	4.1	BA15S	S8	300	10
2604X	5.0	2	G4	TL2.75	5000	18
3898	12	2	BA7S	T2	200	29
5001	6	10	BA15S	B6	200	14
6411	12	10	SV8.5-8	T3.25	200	5
6413	12	5	SV8.5-8	T3.25	200	5
6421	24	3	SV8.5-8	T3.25	1000	5
6424	24	5	SV8.5-8	T3.25	200	5
7387	28	.04	BIPIN	T1.75	7000	19
8013	6	10	BA15D	S8	200	8
8018	6	15	BA15D	T6	100	13
64111	12	5	BA9S	T2.75	240	24
64115	12	20	BA9S	T2.75	240	24
PR18	7.2	0.55	P13.5S	B3.5	3	23
SR12-8	12	0.66	E10	G4.5	100	35



Note:
This is only a small sample of the miniature lamp types available at Bulbman.